

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 188 860 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
20.03.2002 Bulletin 2002/12

(51) Int Cl.7: D21G 9/00, D21C 3/22

(21) Application number: 01307860.5

(22) Date of filing: 14.09.2001

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 15.09.2000 US 663249

(71) Applicants:
• GENERAL ELECTRIC COMPANY
Schenectady, NY 12345 (US)
• Conmark Systems Inc.
Norcross, Georgia 30093 (US)

(72) Inventors:
• Richardsen, Jan T.
Stone Mountain, Georgia 30087 (US)

- Ingman, Lars C
Alpharetta, Georgia 30005 (US)
- Mustonen, Markku
Lawrenceville, Georgia 30244 (US)
- Harris, LaDoris G.
Conyers, Georgia 30094 (US)
- Thomas, Erwin R.
Duluth, Georgia 30097 (US)
- Mouret, Dave A.
Alpharetta, Georgia 30005 (US)
- Fujita, Lincoln M.
Roanoke, Virginia 24018 (US)

(74) Representative: Goode, Ian Roy et al
GE LONDON PATENT OPERATION,
Essex House,
12/13 Essex Street
London WC2R 3AA (GB)

(54) Method and system for optimizing mill operation

(57) A method and system for providing equipment, unit process, department and mill modeling, simulation and optimization tools and services to a user (206) via a communications link. The user is presented with one or more mill data input interfaces (200), and mill data (202) provided through the user interfaces is processed (204) to generate benchmarking data, simulation models, and the like. The simulation models can be interactive and modified to allow a user to explore various techniques to optimize the operation of a machine, unit process, department or mill.

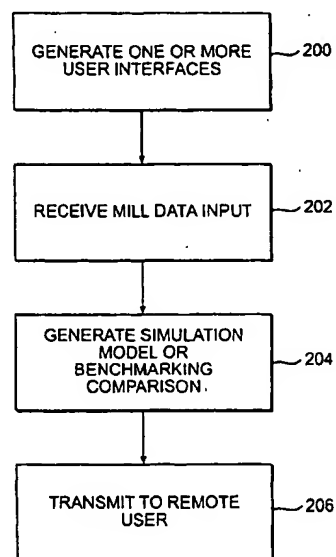


FIG. 2

EP 1 188 860 A2

Description

[0001] As the pulp and paper industries continue to consolidate operations and capacity rationalization, internal engineering staffs appear to be getting smaller and redirected toward operations. There also appears to be an increased reliance on third party consultants and engineering firms to accomplish mill upgrades and improvement planning. Without adding additional capacity, existing machines have heavy demands for efficiency and productivity. Mills frequently seek improvement strategies that require minimal production outages, low risk, and high returns.

[0002] Traditional engineering or consulting firms are used by mills, where consultant hours are sold to work directly with mills to formulate and apply improvement projects, perform feasibility studies and benchmarking, and/or related services. Such services are relatively expensive and require substantial participation by mill personnel.

[0003] Mill equipment suppliers are also a source of services for a mill. Although equipment suppliers may provide benchmarking and improvement planning services at a relatively low cost, equipment suppliers typically have a vested interest in identifying projects that include opportunities to sell their equipment, and for this and other reasons the results may not identify the best opportunities for mill improvement.

[0004] Recently, the Internet has been used to enhance mill services. An Internet website known as "myplant.com" which connects service providers (including consultants, software vendors, equipment providers, and engineering firms) with customers (including plant managers, engineers, operators, technicians, planners, purchasers, etc.). Unfortunately, myplant.com does not provide adequate benchmarking, nor equipment, unit process, department, or mill optimization capabilities.

[0005] U.S. Patent 6,024,835 discloses a quality control apparatus and method for a paper mill. The apparatus includes at least one lab entry station which communicates directly with each laboratory in a paper mill. The lab entry station validates information from each laboratory. The apparatus also includes a gateway entry station which receives information from on-line systems in the paper mill and reformats the received information into a single useable format. A global data base manager communicates with the lab entry station and the gateway entry station identifies each bit of information received and assigns addresses for the identified information. A communication manager transmits the received information from the global data base manager to operator stations. Operator stations provide user interfaces throughout the paper mill at which data can be displayed and analyzed. According to the disclosure, various locations throughout a paper mill can assess their own ability to conform to specifications and operational standards. Additionally, at least selected locations in the paper mill can purportedly assess the impact of

performance at one location in the paper mill on performance at other locations.

[0006] It would be desirable for a pulp or paper mill service application to provide accurate simulations. It would also be desirable for such an application to be easy to use and configurable. It would further be desirable for such an application to ensure secure access over a communication network, whether a local mill network, Internet or Extranet. In addition, it would be desirable for such an application to offer substantial neutrality (i.e., substantially vendor-independent) and confidentiality to its users. It would still further be desirable for such an application to provide benchmarking, modeling, simulation and mill optimization tools and solution capabilities for performance indicators, and to identify opportunities for improvement in the mill process. Furthermore, it would be desirable to provide easy access to expertise to facilitate mill process improvement.

[0007] The present invention overcomes the above-noted deficiencies of existing solutions, and achieves additional advantages, by providing for a virtual mill which, in the exemplary embodiments presented below, can be implemented as a client server system, installed locally at the mill site, or as a web-based, cost-effective solution to convert available equipment, plant, production, product and cost data into performance information for one or more mills. This information can be benchmarked against design expectations, similar mills, industry averages, best in class mills, or other relevant benchmarking data. The user can choose to customize one or more simulation models to further refine the data, and then use the customized model to initiate such improvements as de-bottlenecking, condition-based maintenance, and performance improvements.

[0008] The present invention and its features and advantages can be understood more fully by reading the following Detailed Description of presently-preferred embodiments of the invention together with the accompanying drawings in which:

FIG. 1 is a block diagram of a computer network suitable for implementing a method according to the present invention;

FIG. 2 is a block diagram describing the steps of a method according to one embodiment of the present invention;

FIGs. 3-10 are sample data input interfaces displayed to a user in one embodiment of the present invention; and

FIG. 11 is a sample simulation model interface displayed to a user in one embodiment of the present invention.

[0009] It will be appreciated that for purposes of the following description, a "server" may be or include, for

instance, a workstation running the Microsoft Windows™ NT™, Windows™ 2000, Unix, Linux, Xenix, IBM AIX™, Hewlett-Packard UX™, Novell Netware™, Sun Microsystems Solaris™, OS/2™, BeOS™, Mach, Apache, OpenStep™ or other operating system or platform.

[0010] Further a "communications link" may be, include or interface to any one or more of, for instance, a local client-server mill network, the Internet, an Extranet, a PAN (Personal Area Network), a LAN (Local Area Network), a WAN (Wide Area Network) or a MAN (Metropolitan Area Network), a storage area network (SAN), a frame relay connection, an Advanced Intelligent Network (AIN) connection, a synchronous optical network (SONET) connection, a digital T1, T3, E1 or E3 line, Digital Data Service (DDS) connection, DSL (Digital Subscriber Line) connection, an Ethernet connection, an ISDN (Integrated Services Digital Network) line, a dial-up port such as a V.90, V.34 or V.34bis analog modem connection, a cable modem, an ATM (Asynchronous Transfer Mode) connection, or an FDDI (Fiber Distributed Data Interface) or CDDI (Copper Distributed Data Interface) connection. "Communications link" may furthermore be, include or interface to any one or more of a WAP (Wireless Application Protocol) link, a GPRS (General Packet Radio Service) link, a GSM (Global System for Mobile Communication) link, a CDMA (Code Division Multiple Access) or TDMA (Time Division Multiple Access) link such as a cellular phone channel, a GPS (Global Positioning System) link, CDPD (cellular digital packet data), a RIM (Research In Motion, Limited) duplex paging type device, a Bluetooth radio link, or an IEEE 802.11-based radio frequency link. "Communications link" may yet further be, include or interface to any one or more of an RS-232 serial connection, an IEEE-1394 (Firewire) connection, a Fibre Channel connection, an IrDA (infrared) port, a SCSI (Small Computer Systems Interface) connection, a USB (Universal Serial Bus) connection or other wired or wireless, digital or analog interface or connection.

[0011] Further, a "database" may be, include or interface to, for example, the PI data base sold commercially by OSI Software Inc. Other databases, such as Oracle™, Informix™, DB2 (Database 2), Sybase or other data storage or query formats, platforms or resources such as OLAP (On Line Analytical Processing), SQL (Standard Query Language), a storage area network (SAN), Microsoft Access™ or others may also be used, incorporated or accessed in the invention.

[0012] A computer system 100 connected to a computer network such as the Internet is generally illustrated in FIG. 1. A conventional client computer system 102 (hereinafter "client") owned by a customer, executes a client browser application that supports the HTTP protocol, (e.g., Internet Explorer™, available from Microsoft Corporation). The client 102 is typically connected through an Internet Service Provider (ISP) to the Internet 104. A supplier owned server computer system 106

(hereinafter "server") is also coupled typically through an Internet Service Provider to the Internet 104. The server 106, controlled by a local console 108, executes a web server application and also hosts at least one web page for distribution over the Internet.

[0013] The client 102 requests a web page by issuing a URL request through the Internet 104 to the server system 106. A URL consistent with the present invention may be a simple URL of the form:

```
<protocol_identifier>://<server_path>/
<web_page_path>
```

[0014] A "protocol_identifier" of "http" specifies the conventional hyper-text transfer protocol. A URL request for a secure Internet transaction typically utilizes the secure protocol identifier "https," assuming that the client browser and web server are presumed to support and implement the secure sockets layer (SSL). The "server_path" is typically of the form "prefix.domain," where the prefix is typically "www" to designate a web server and the "domain" is the standard Internet sub-domain.top-level-domain of the server 106. The optional "web_page_path" is provided to specifically identify a particular hyper-text page maintained by the web server.

[0015] In response to a received URL identifying an existing web page, the server 106 returns the web page, subject to the HTTP protocol, to the client 102. This web page typically incorporates both textural and graphical information including embedded hyper-text links (hereinafter "hyperlink") that permit the client user to readily select a next URL for issuance to the Internet 104.

[0016] The URL issued from the client 102 may also be of a complex form that identifies a common gateway interface (CGI) program on server 106. Such a HTML hyperlink reference is typically of the form:

```
<form action="http://www.vendor.com/cgi-bin/log-
on.cgi" method=post>
```

[0017] A hyperlink of this form directs the execution of the logon.cgi program on an HTTP server in response to a client side selection of a hyperlink. A logon form supported by a logon CGI program is typically used to obtain a client user login name and password to initiate an authenticated session between the client browser and Web server for purposes of supporting, for example, a secure purchase transaction.

[0018] Referring now to FIG. 2, a block diagram describing a method according to one embodiment of the present invention is shown. Such a method can be implemented by an appropriate software program executed by the server in the configuration of FIG. 1. It will of course be appreciated that a corresponding method can be performed by a user connected to the server by an appropriate communication link such as that shown in FIG. 1. The user may be located remotely or may be a local system user.

[0019] The method of FIG. 2 begins in step 200, where a user accesses a server over a communications link and the server responds by causing one or more user interfaces to be displayed to the user. For security

purposes, a first user interface can include a credential request interface which provides appropriate interactive fields for the user to identify his or her credentials (e.g., a user identity and password). Alternative or additional interfaces can include other types of a data input interfaces such as will be described in more detail below. In step 202, the server receives data input by the user via the one or more user interfaces. The data input will typically include mill operational data for one or more user machines, unit processes, departments or mills of which the user has knowledge. Such mill operational data can include, but is not limited to, various control settings or performance measurements for one or more mill components. In step 204, the server or associated processing resources generates one or more of mill simulation models or benchmarking comparisons based on the data input in step 202. In step 206, the server can transmit, or otherwise cause to be displayed to the user, the one or more simulation models and/or benchmarking comparisons.

[0020] In the case of benchmarking comparison, step 204 can be performed by querying a database to identify similar mills and to retrieve corresponding mill operational data for the similar mills. A benchmarking comparison can be of any suitable format which provides a visual comparison of mill performance data based on the data supplied by the user with mill performance data of one or more similar mills based on the database query. A benchmarking comparison can be provided as a visual display (e.g., as an Internet web page) to the user via the network, as a text message (or attachment) sent to the user by the server using electronic mail, wireless paging, or some other suitable technique.

[0021] In the case of mill simulation models, step 204 can be performed by consulting a database or other program to generate an appropriate visual model for display to the user. The user may optionally be provided the opportunity to verify that the simulation model generated in step 204 correctly reflects the information supplied by the user, and the opportunity to request correction of the simulation model (e.g., to add, delete, or modify components represented in the visual model) if necessary. The simulation models, which will be described in more detail below, are preferably dynamic and interactive, such that a user can modify settings on one or more mill components (or the components themselves, or other suitable aspects of the simulation model) to change the simulation model or otherwise effectively generate a new simulation model.

[0022] Referring now to FIGs. 3-10, various exemplary user interfaces according to one embodiment of the present invention are shown. All interfaces are Copyright 2000, Conmark Systems Inc. and General Electric Company. In FIG. 3, a first mill data input interface 300 is shown. The first mill data input interface shows a typical integrated pulp and paper mill environment which includes illustrations or other appropriate representations of a wood yard 302, a digester 304, a brown stock

washing unit process 306, a bleaching unit process 308, a power and steam unit process 309, evaporators 310, recovery boiler 312, a recaust unit process 314, a lime kiln unit process 316, a stock prep unit process 318, a wet end section 320, a pressing section 322, a drying section 324, a finishing department 326, and a shipping department 328.

[0023] Referring now to FIG. 4, a similar user interface is shown in which certain of the mill components (namely, the digester 304, brown stock washing unit process 306, power and steam unit process 309, and lime kiln unit process 316) are highlighted and circled to indicate that these components, and their associated data input screens, will now be discussed with reference to FIGs. 5-10.

[0024] Referring now to FIG. 5, a mill data input user interface 500 is shown such as might be generated by the server and displayed to the user in accordance with the method described with respect to FIG. 2. The interface 500 in this example is generated by the user selection (e.g., via mouse click or other suitable technique) of the digester 304 on the user interface 300 of FIG. 3. The interface 500 in this embodiment can be referred to as a pictogram selection screen which contains various interactive pictograms 502 indicative of various types of digesters. The interactive pictograms 502 in this embodiment include interactive fields 504 associated with each pictogram. The user can select a particular type of digester illustrated in the pictogram by activating (e.g., performing a mouse click) the corresponding interactive field 504. It will be appreciated that instead of providing interactive fields 504, each entire pictogram 502 can be presented as an interactive field.

[0025] Numerous other alternative means for selecting components can also be provided.

[0026] Referring now to FIG. 6, a mill data input user interface 600 is shown such as might be generated by the server and displayed to the user based on the user's selection of a particular digester type from the interface 500. The interface 600 includes, in this embodiment, an interactive "data fill screen" field 602 which provides an interactive list of various control settings, performance indicators, parameter limitations, and other relevant information corresponding to the selected digester type. The interactive list is presented to, or caused to be presented to, the user by the server and allows the user to select any of a plurality of parameter fields to input, delete, or modify the selected parameter, setting, indicator, limitation, etc. The interface 600 further includes an interactive "data entry complete" field 604 which the user can activate to inform the server that the user has finished entering or modifying all relevant information.

[0027] At this point the server can return the user to the main mill data interface 300, where the user can select an additional mill component and enter appropriate mill data. Referring now to FIG. 7, another mill data input user interface 700 is shown such as might be generated by the server and displayed to the user based on the

user's selection of the brown stock washing unit process from the interface 300 in FIG. 3. Similar to interface 500 in FIG. 5, the interface 700 in FIG. 7 displays numerous pictograms 702 representing different types of stock washing arrangements or techniques. Associated with each pictogram 702 is an interactive field 704 which can be activated by the user to identify the washing type of interest to the user.

[0028] Referring now to FIG. 8, another mill data input user interface 800 is shown such as might be generated by the server and displayed to the user based on the user's selection of a particular washing type in the interface 700. The interface 800 includes a data fill screen 802 which presents an interactive list of various brown stock washing parameters corresponding to the selected washing type. The interactive list can be completed and edited by the user to reflect the conditions and settings at a mill known to the user. The interface 800 further includes a data entry complete field 804 which the user can select to indicate that the user has finished entering or modifying all relevant information.

[0029] It will be appreciated that the step of providing a pictogram selection screen may be avoided for certain components of the mill displayed in interface 300. Referring now to FIG. 9, a mill data input user interface 900 is shown such as might be generated by the server and displayed to the user based on the user's selection of the lime kiln unit process 316. The interface 900 is a data input screen for a lime kiln unit process, and includes an interactive list of lime kiln parameters or conditions to be entered and/or modified by the user. Similar to the other interfaces discussed above, the interface 900 includes an interactive "data entry complete" field 904.

[0030] Referring now to FIG. 10, yet another mill data input user interface 1000 is shown, such as might be generated by the server and displayed to the user based on the user's selection of the power and steam unit process 309 from the interface 300. The user interface 1000 includes numerous interactive data fields allowing the user to input or modify data regarding a particular mill's power and steam generation components. The user interface 1000 further includes an interactive "data entry complete" field 1004 which is similar to the other interfaces discussed above.

[0031] It will be appreciated that additional or alternative data interfaces can be provided by the server to the user to obtain mill data descriptive of a user mill. Based on the data input through such interfaces (or supplied by other means), the server or associated processing circuitry can query, execute, or consult one or more databases, software programs, or other suitable resources to generate one or more simulation models for one or more user mills.

[0032] Referring now to FIG. 11, a portion of a simulation model according to one embodiment of the present invention is shown. In one embodiment of the present invention, a product known as "Flow-Mac",

available from PaperMac AB, is used to generate the model of FIG. 11, but numerous other suitable programs exist and can be used. Such a simulation model can be displayed to the user under the control of the server, based on the data input by the user in the manner described above. Multiple simulation models can be generated and displayed for individual components (e.g., paper machine simulation, lime kiln simulation, batch digester simulation, etc.). As shown, the simulation model of FIG. 11 identifies numerous components, including connections to other components and various component parameters. In one embodiment animation effects such as tracers, colors, or flashing components can be provided to indicate certain areas of the simulation mill where conditions fall below or exceed a relevant threshold. In another embodiment, the simulation model includes one or more interactive components such that the component can be selected by the user, an interactive data screen can be produced by the server, the user can modify data via the interactive data screen, and the server can modify (or generate anew) a simulation model based on the modified data. In yet another embodiment, the server is configured to automatically generate and provide (e.g., display or transmit by message) consulting information such as tips, advice, or suggestions for improving the performance of the user's mill. As one example of this embodiment, if the server and/or its associated software programs identifies one or more bottlenecks in the user's mill (based on the mill data provided by the user), the server can generate, or cause to be generated, a document or listing of de-bottlenecking solutions. Such information can be stored in a database associated with the server, and may be based on de-bottlenecking solutions used by other mill operators using similar mill components.

[0033] It will be appreciated that the embodiments described above enable a user to identify and resolve mill problems, and explore ways to optimize mill performance. The system provides accurate simulations and benchmarking information, ease of use, configurability, secure access, and numerous other advantages without the time- (and mill human resource-) consuming and expensive techniques of traditional engineering consultants.

[0034] For completeness, various aspects of the invention are set out in the following numbered clauses:

1. A method for providing mill-related services to a user over a communications link, comprising the steps of:

causing one or more user interfaces to be displayed to the user (200);
receiving input data (202) from a user over a communications link descriptive of one or more user mills;
generating (204), from the user input, one or more of simulation models or benchmarking

comparisons for the one or more user mills; and transmitting (206) the one or more simulation models or benchmarking comparisons to the user for display.

2. The method of clause 1, wherein the one or more user interfaces include a credential request interface, and wherein the method further comprising the steps of receiving and processing credential information supplied by the user.

3. The method of clause 2, wherein the credential information includes a user name and a password.

4. The method of clause 2, wherein the step of processing is performed by the steps of:

comparing the credential information with information stored in a database;
determining whether the credential information matches a first set of stored information, matches a second set of stored information, or does not match any stored information; and
returning a result to the user based on the step of determining.

5. The method of clause 4, wherein the first set of stored information defines authorized users, the second set of stored information defines expressly unauthorized users, and wherein credential information not matching the stored information corresponds to unregistered users.

6. The method of clause 1, wherein the one or more interfaces include mill data entry interfaces, and wherein the input data includes operational data for a mill.

7. The method of clause 6, wherein the mill data entry interfaces are selectable by the user.

8. The method of clause 1, wherein the simulation models are dynamic, such that one or more component settings can be varied by the user to generate one or more alternative simulation models.

9. The method of clause 1, wherein the benchmarking comparisons are provided as a visual display to the user.

10. The method of clause 1, wherein the benchmarking comparisons are provided as a text message to the user.

11. A system for providing optimization services for a mill, comprising: a database (108) storing operational data for one or more mills; and
a server (106) operatively associated with the

database and a communications network, the server configured to receive mill data input from a user and to generate one or more of mill simulation models or benchmarking comparison based on the mill data input from the user and the operational data stored in the database.

12. The system of clause 11, wherein the server is configured to receive the mill data input via one or more user interfaces generated by the server for display to the user.

13. The system of clause 12, wherein the one or more user interfaces include a credential request interface for receiving and processing credential information supplied by the user.

14. The system of clause 13, wherein the credential information includes a user name and a password.

15. The system of clause 13, wherein the server is further configured to compare the credential information with information stored in a database; determine whether the credential information matches a first set of stored information, matches a second set of stored information, or does not match any stored information; and return a result to the user based on the comparison.

16. The system of clause 15, wherein the first set of stored information defines authorized users, the second set of stored information defines expressly unauthorized users, and wherein credential information not matching the stored information corresponds to unregistered users.

17. The system of clause 12, wherein the one or more interfaces include mill data entry interfaces, and wherein the input data includes operational data for a mill.

18. The system of clause 17, wherein the mill data entry interfaces are selectable by the user.

19. The system of clause 11, wherein the simulation models are dynamic, such that one or more component settings can be varied by the user to generate one or more alternative simulation models.

20. The system of clause 11, wherein the server is further configured to provide benchmarking comparisons as a visual display to the user.

21. The system of clause 11, wherein the server is further configured to provide benchmarking comparisons as a text message to the user.

22. A method for determining mill-related conditions

over a communications link, comprising the steps of:

receiving one or more user interfaces (200);
providing data (202) to a server (106) by inter-
acting with the one or more user interfaces by
providing requested input data descriptive of
one or more mills; and
receiving (206) from the server one or more of
simulation models or benchmarking compar-
isons for the one or more user mills based on
the input data.

23. The method of clause 22, wherein the one or
more user interfaces include a credential request
interface, and wherein the method further compris-
ing the steps of providing credential information to
the server.

24. The method of clause 23, wherein the credential
information includes a user name and a password.

25. The method of clause 22, wherein the one or
more interfaces include mill data entry interfaces,
and wherein the input data includes operational da-
ta for a mill.

26. The method of clause 25, further comprising the
step of selecting the mill data entry interfaces from
among a plurality of interfaces.

27. The method of clause 22, further comprising the
steps of selecting one or more components in the
simulation model, varying the component settings
of the selected component, and receiving a modi-
fied simulation model based on the varied compo-
nent settings.

28. The method of clause 22, wherein the bench-
marking comparisons are received as a visual dis-
play.

29. The method of clause 22, wherein the bench-
marking comparisons are received as a text mes-
sage.

30. A system for providing optimization services for
a mill, comprising:

a database (108) storing operational data and
one or more executable mill optimization pro-
grams for one or more mills; and
a server (106) operatively associated with the
database and a communications network, the
server configured to receive mill data input from
a user and to generate at least one mill simu-
lation model and at least one benchmarking
comparison based on the mill data input from

the user and the operational data and one or
more executable mill optimization programs
stored in the database.

31. The system of clause 30, wherein the server is
configured to receive the mill data input via one or
more user interfaces generated by the server for
display to the user.

32. The system of clause 31, wherein the one or
more user interfaces include a credential request
interface for receiving and processing credential in-
formation supplied by the user.

33. The system of clause 32, wherein the credential
information includes a user name and a password.

34. The system of clause 32, wherein the server is
further configured to compare the credential infor-
mation with information stored in a database; deter-
mine whether the credential information matches a
first set of stored information, matches a second set
of stored information, or does not match any stored
information; and return a result to the user based
on the comparison.

35. The system of clause 34, wherein the first set
of stored information defines authorized users, the
second set of stored information defines expressly
unauthorized users, and wherein credential infor-
mation not matching the stored information corre-
sponds to unregistered users.

36. The system of clause 31, wherein the one or
more interfaces include mill data entry interfaces,
and wherein the input data includes operational da-
ta for a mill.

37. The system of clause 36, wherein the mill data
entry interfaces are selectable by the user.

38. The system of clause 30, wherein the simulation
models are dynamic, such that one or more com-
ponent settings can be varied by the user to gener-
ate one or more alternative simulation models.

39. The system of clause 30, wherein the server is
further configured to provide benchmarking com-
parisons as a visual display to the user.

40. The system of clause 30, wherein the server is
further configured to provide benchmarking com-
parisons as a text message to the user.

41. A storage medium encoded with computer-
readable code, comprising:

one or more instructions for causing one or

more user interfaces to be displayed to the user;
 one or more instructions for receiving input data from a user over a communications link descriptive of one or more user mills;
 one or more instructions for generating, from the user input, one or more of simulation models or benchmarking comparisons for the one or more

Claims

1. A method for providing mill-related services to a user over a communications link, comprising the steps of:
 - causing one or more user interfaces to be displayed to the user (200);
 - receiving input data (202) from a user over a communications link descriptive of one or more user mills;
 - generating (204), from the user input, one or more of simulation models or benchmarking comparisons for the one or more user mills; and
 - transmitting (206) the one or more simulation models or benchmarking comparisons to the user for display.
2. A method for determining mill-related conditions over a communications link, comprising the steps of:
 - receiving one or more user interfaces (200);
 - providing data (202) to a server (106) by interacting with the one or more user interfaces by providing requested input data descriptive of one or more mills; and
 - receiving (206) from the server one or more of simulation models or benchmarking comparisons for the one or more user mills based on the input data.
3. The method of claim 1 or claim 2, wherein the one or more user interfaces include a credential request interface, and wherein the method further comprising the steps of receiving and processing credential information supplied by the user.
4. The method of claim 1 or claim 2, wherein the one or more interfaces include mill data entry interfaces, and wherein the input data includes operational data for a mill.
5. A system for providing optimization services for a mill, comprising: a database (108) storing operational data for one or more mills; and
 a server (106) operatively associated with the

database and a communications network, the server configured to receive mill data input from a user and to generate one or more of mill simulation models or benchmarking comparison based on the mill data input from the user and the operational data stored in the database.

6. A system for providing optimization services for a mill, comprising:

a database (108) storing operational data and one or more executable mill optimization programs for one or more mills; and
 a server (106) operatively associated with the database and a communications network, the server configured to receive mill data input from a user and to generate at least one mill simulation model and at least one benchmarking comparison based on the mill data input from the user and the operational data and one or more executable mill optimization programs stored in the database.

7. The system of claim 5 or claim 6, wherein the server is configured to receive the mill data input via one or more user interfaces generated by the server for display to the user.
8. The system of claim 7, wherein the one or more user interfaces include a credential request interface for receiving and processing credential information supplied by the user.
9. The system of claim 7, wherein the one or more interfaces include mill data entry interfaces, and wherein the input data includes operational data for a mill.
10. A storage medium encoded with computer-readable code, comprising:

one or more instructions for causing one or more user interfaces to be displayed to the user;
 one or more instructions for receiving input data from a user over a communications link descriptive of one or more user mills;
 one or more instructions for generating, from the user input, one or more of simulation models or benchmarking comparisons for the one or more user mills; and
 one or more instructions for transmitting the one or more simulation models or benchmarking comparisons to the user for display.

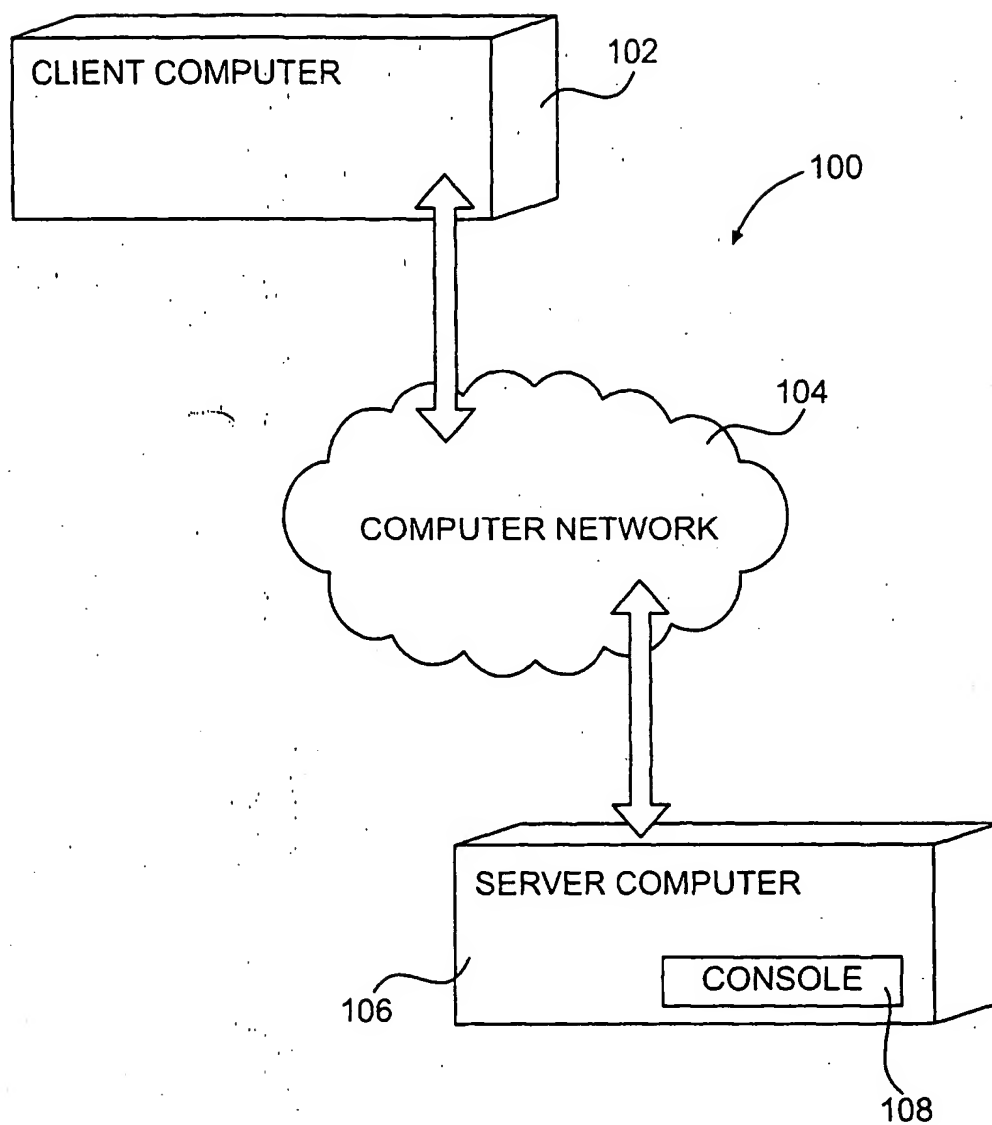


FIG. 1

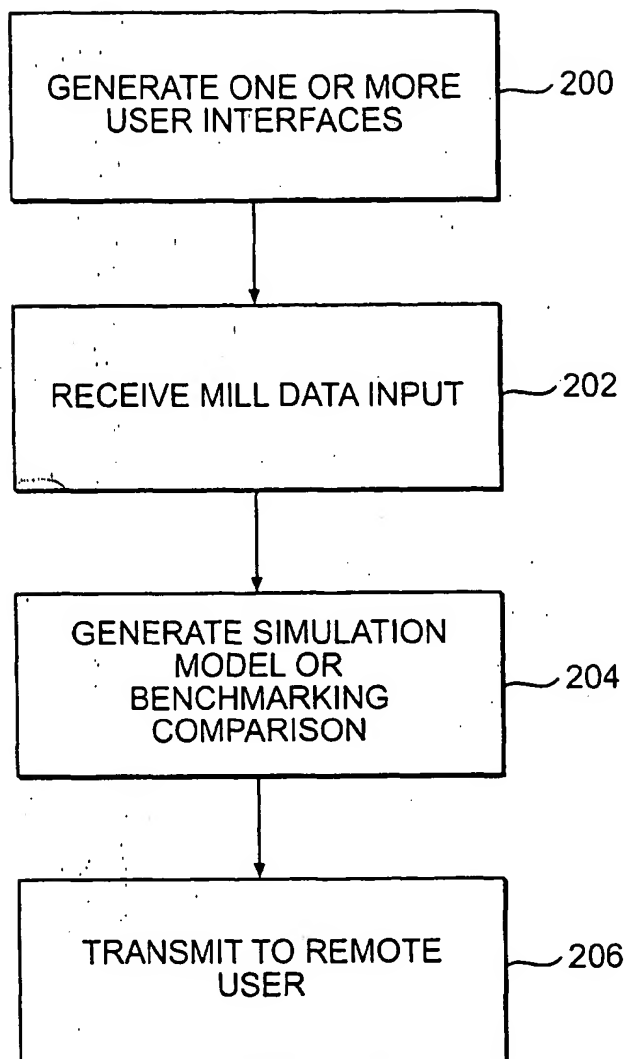


FIG. 2

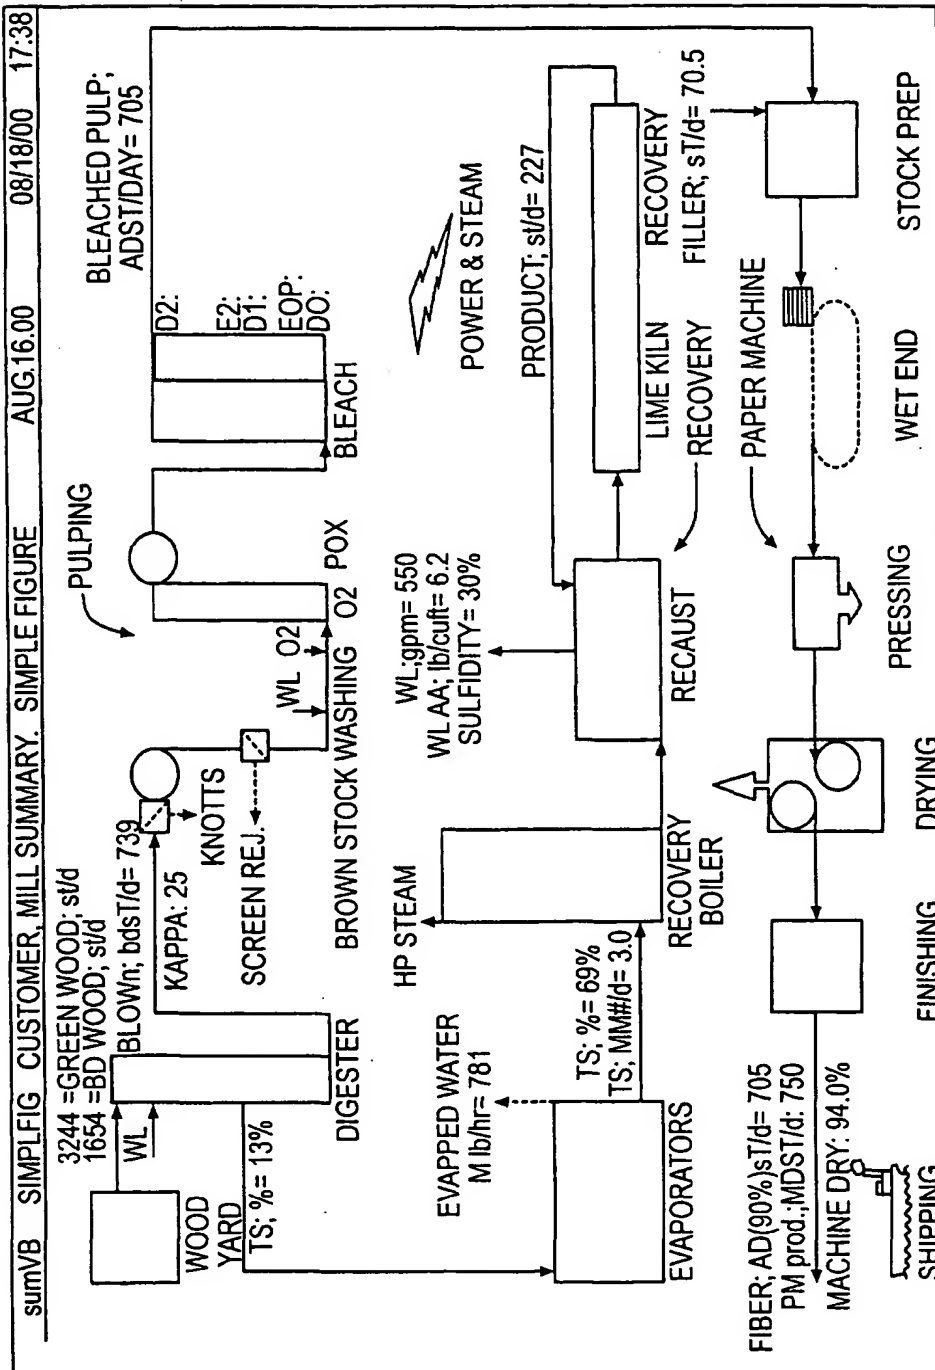


FIG. 3

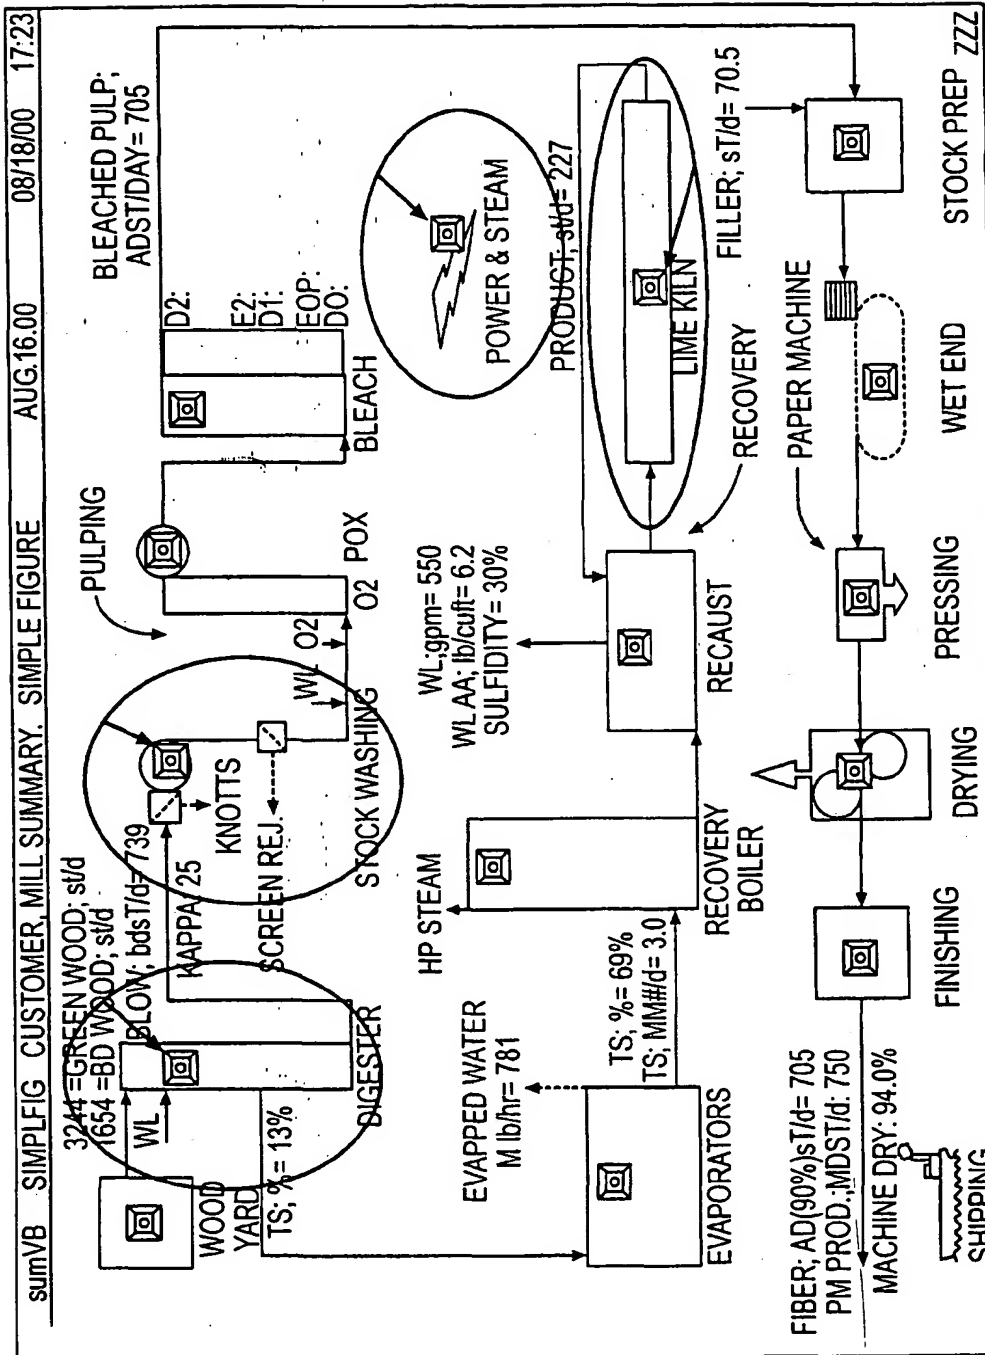


FIG. 4

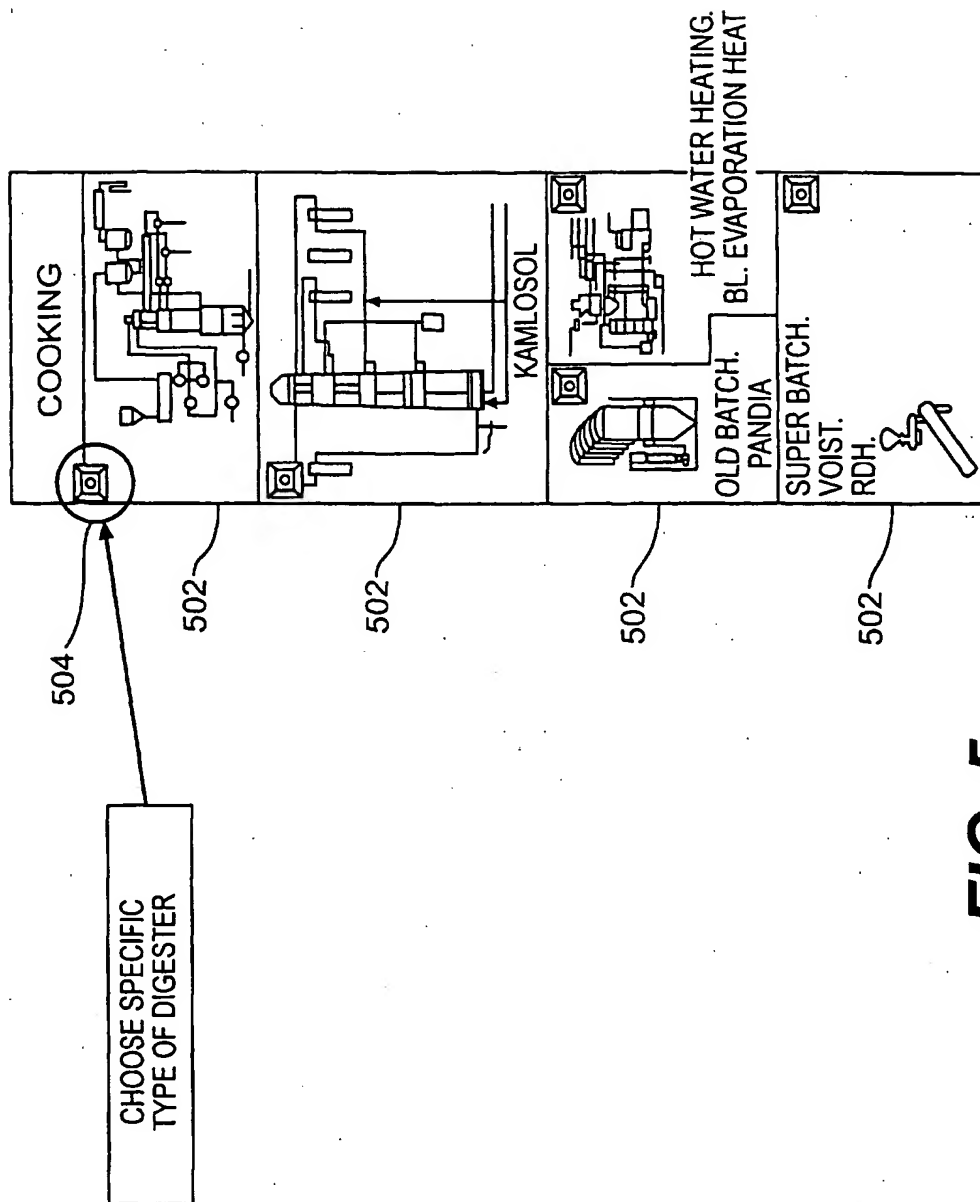


FIG. 5

| COOKING | | DATA FILL SCREEN | | | | | | | | | |
|-------------------------------|----------|-------------------------------------|----------|----------|--------|------|-------|-----------|------------|-----|--------|
| COOKING | | COOKING | | | | | | | | | |
| TYPE | Kam1vHvd | K1vSPH | Ksawdust | Kam2vHvd | K2vSPH | Eska | Batch | Super-Bat | Ener-Batch | M&D | Pandia |
| | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 |
| BATCH | | NICE | | | | | | | | | |
| FINAL COOKING TEMP DEG C: | | CHIP TEMP° C: | | | | | | | | | |
| BL CHARGE Kg/min: | | WHITE LIQUOR TEMP° C: | | | | | | | | | |
| LIQ/WOOD WANTED: | | WL SPECIFIC HEAT: | | | | | | | | | |
| NUMBER OF DIGESTERS: | | WL SPECIFIC GRAVITY: | | | | | | | | | |
| VOLUME Cuf/DIGESTER: | | BL SOLIDS FRACTION: | | | | | | | | | |
| | | BL FILTRATE° C: | | | | | | | | | |
| | | CB FLOW SPECIFIC HEAT: | | | | | | | | | |
| | | EXOTHERM Kcal/kg diss. WOOD SOLIDS: | | | | | | | | | |
| KAMLR | | ASSUME TEMP. FROM BLOTNK, °C: | | | | | | | | | |
| CHIP BIN TEMP DEG C: | | INDIRECT STEAMING, °C: | | | | | | | | | |
| IMP VESSEL EXTRACTION Kg/min: | | WATER TEMP TO CONDENSOR, °C: | | | | | | | | | |
| TOT SOLIDS LAST WASH Kg/bdmt: | | WATER TMP FROM CONDENSOR, °C: | | | | | | | | | |
| WL TO FEED: FRACTION : | | CONDENSOR TRANSF.: kcal/m2/hr°C: | | | | | | | | | |
| WL TO IV CENTR: FRACTION: | | SV VENT: Kg/Kg BD WOOD : | | | | | | | | | |
| WL TO BOT CIRC: FRACTION LCC: | | STEAMING VESSEL TMP °C: | | | | | | | | | |
| WL TO MC CIRC: FRACTION : | | IMP VESSEL EXTRACT; SOLID FRACT: | | | | | | | | | |
| WL TO WASH CIRC: FRACTION : | | BLOW CONSISTENCY; FRACT BD : | | | | | | | | | |
| ENTALPI; sim FT2 Kcal/Kg : | | | | | | | | | | | |
| BC TEMP DEG C (OR LCC): | | | | | | | | | | | |
| DIG TOP STM PHASE DEG C : | | | | | | | | | | | |
| MCC TEMP DEG C | | | | | | | | | | | |
| HIHEAT WASH TEMP DEG C: | | | | | | | | | | | |
| KAMLOSOL | | | | | | | | | | | |
| HOT WATER HEATING. | | | | | | | | | | | |
| BL | | | | | | | | | | | |
| EVAPORATION | | | | | | | | | | | |
| HEAT | | | | | | | | | | | |
| PANDIA | | | | | | | | | | | |
| SUPER BATCH. | | | | | | | | | | | |
| VOIST. | | | | | | | | | | | |
| RDH. | | | | | | | | | | | |

FIG. 6

DATA ENTRY

604


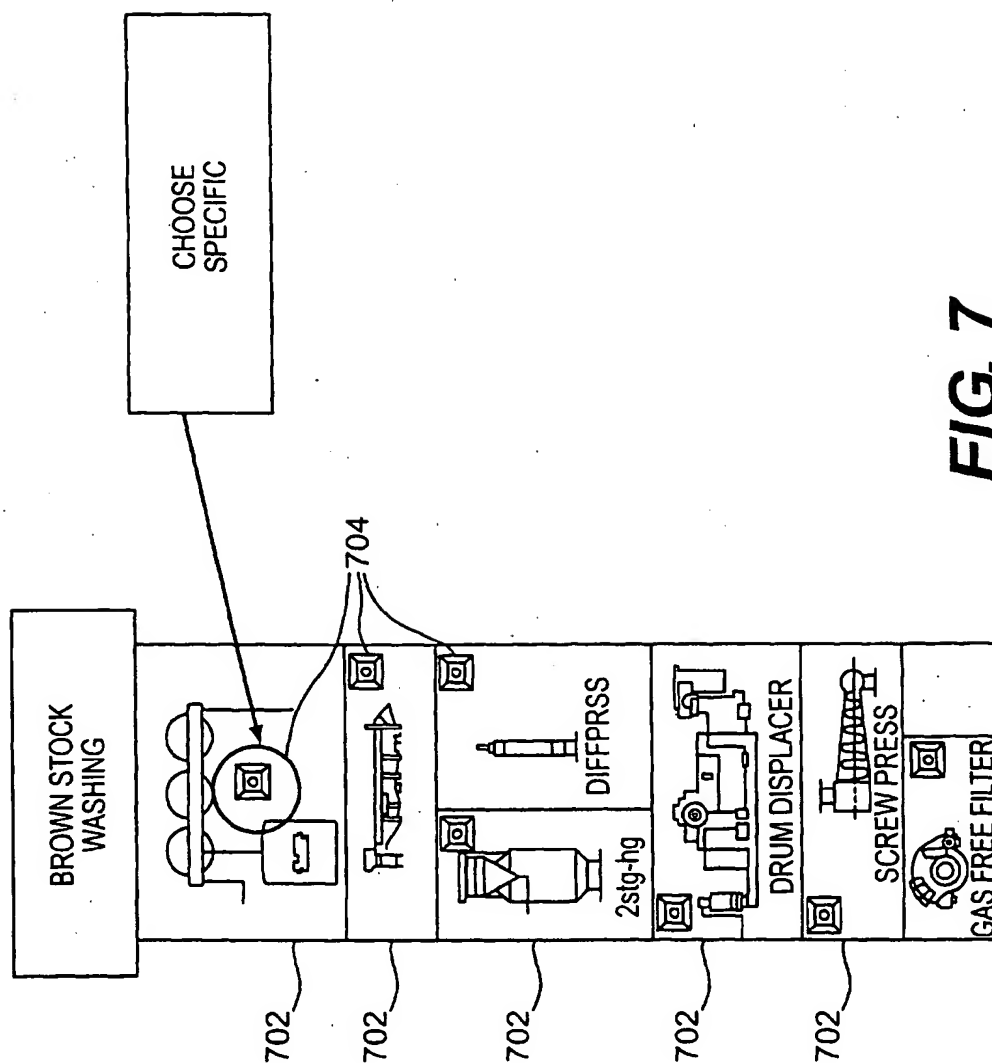


FIG. 7

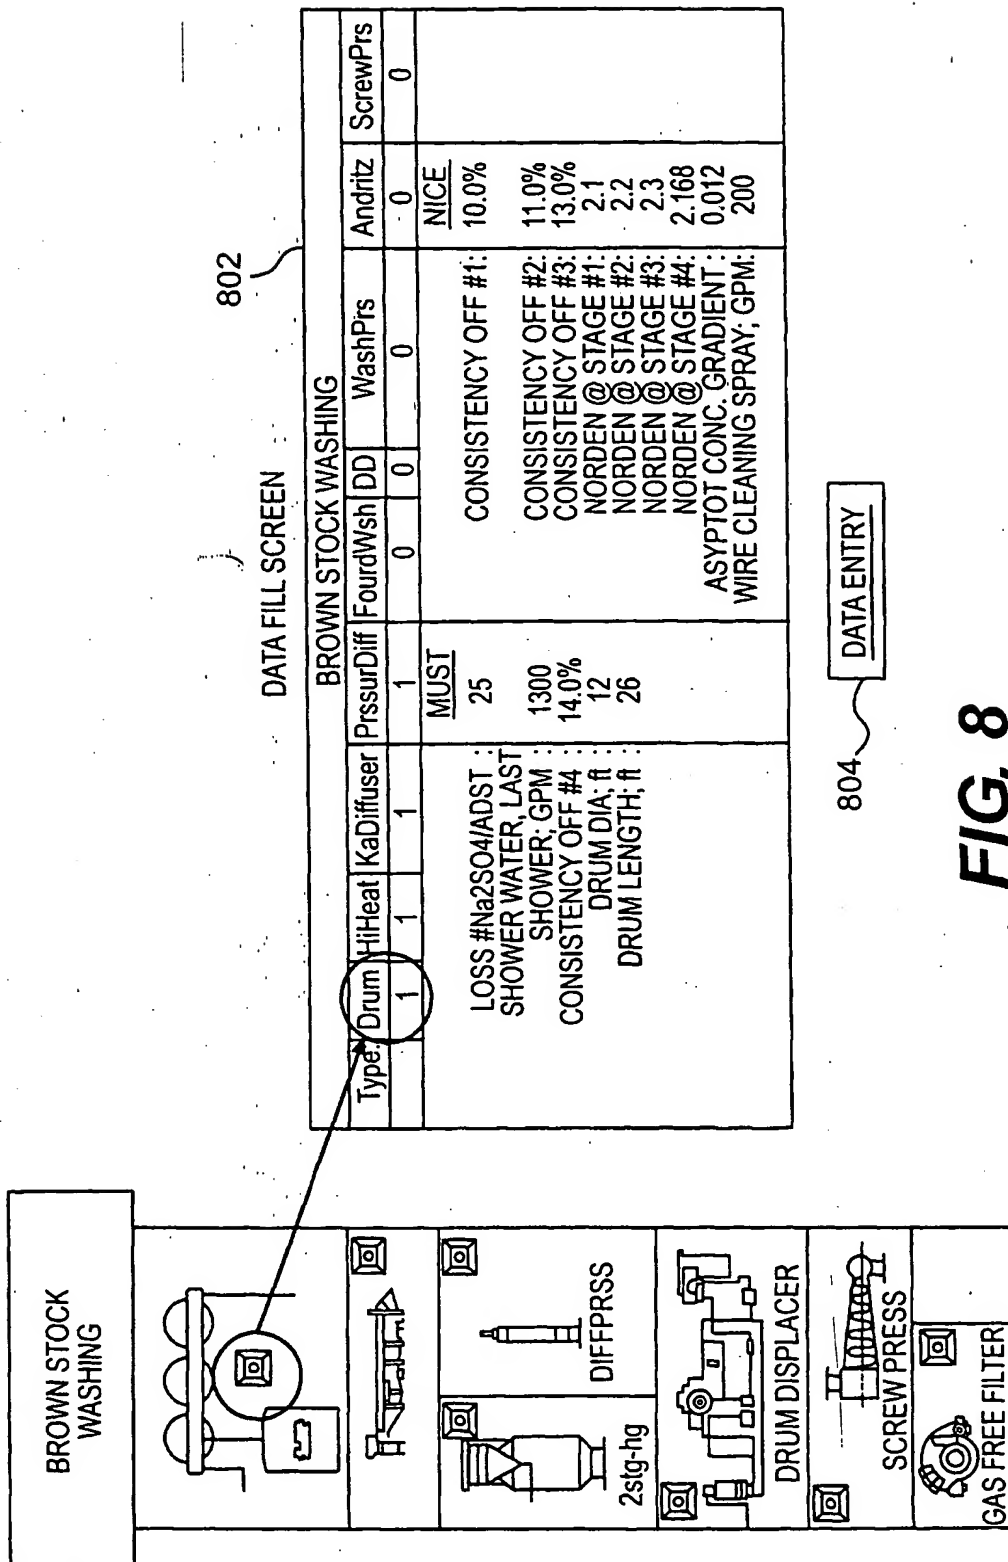

| | | | | | | | | | | | |
|--|-----------|------------------------|-----------|----------|---------|---------------|-----------|----------|----------|-----------|--------|
| MUNIN.XLS | KLINQUEST | LIME KILN INPUT SCREEN | MAY.12.00 | 09/10/00 | 9:00 | | | | | | |
| YOUR NUMERICAL INPUTS SHOULD BE= BOLD BLUE | | | | | | | | | | | |
| OVERVIEW | | | | | | | | | | | |
| GRADE: | LINER | MOT/LINER | MULTIPLY | SACK | COATUB | PRINT | WRITE | COATBIBd | MKT PULP | VISCOSE | OTHER |
| | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 |
| PULP RODUCTION: ADMITd: 1000 | | | | | | | | | | | |
| PLACE: | US South | US NE | US NW | CAN. W | CAN. E | CENT AM | S AMERICA | SCAN | JPN | INDONESIA | OTHER |
| | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| KILN | | | | | | | | | | | |
| TYPE: | OIL | GAS | LMD | FEEDBELT | COOLERS | PRECIPITATION | PCFILTER | Ahstrom | AlisC | FLS | FULLER |
| | 1 | 0 | 0 | 0 | 1 | 1 | 1 | 0 | 0 | 1 | 0 |
| <div style="display: flex; justify-content: space-between;"> <div> <p>KILN PRODUCTION: sT PRODUCT/DAY: 311</p> <p>MUD DRYNESS: FRACTION: 0.68</p> <p>FLUE GAS TEMP DEG C: 260.0</p> <p>FUEL: Kcal/Kg: 10000</p> <p>REPORTED MM BTU/ST PRODUCT: 7</p> <p>EXCESS OXYGEN: %: 1.9%</p> <p>KILN LENGTH: METERS: 85.344</p> <p>KILN I.D. STEEL: METERS: 3.657</p> <p>KILN RPM: 1</p> <p>BURNING ZONE: FRACTION OF WHOLE KILN: 0.25</p> <p>INTERMEDIATE ZONE: FRACTION: 0.5</p> <p>DRYING ZONE: FRACTION: 0.25</p> </div> <div> <p>RECIRCULATED DUST: FRACTION OF FEED: 0.2</p> <p>WATER SOLUBLE Na IN FEED: 0.4%</p> <p>PRODUCT RESIDUAL CARBONAT: 1.5%</p> <p>LIME AVAILABILITY: 92%</p> <p>PRODUCT EXIT TEMP DEG C: 400</p> <p>EXCESS AIR FRACTION: 0.33</p> <p>DISS HEAT Kcal/Kg CaO: 760</p> <p>BURN ZONE ht TRANSFER kcal/m/m2: 110</p> <p>INTERM Z. ht TRANSFER kcal/m/m2: 80</p> <p>DRYING Z. HEAT TRANSF kcal/m/m2: 70</p> <p>KILN SLOPE: DEGREES: 1.1</p> <p>POUNDS OF CHAIN: 20000</p> <p>WL GPM: TYPICAL: 798</p> <p>WL q/AA: 102</p> <p>SULFIDITY: 35%</p> <p>PARTICULATE: GRAINS/SCFM: <13</p> <p>TRS: PPM @ 10% O2: <8</p> </div> </div> | | | | | | | | | | | |


CONTINUED ON FIG. 9 CONT.

FIG. 9

CONTINUED FROM FIG. 9

| | |
|---|--|
| PLEASE GIVE A SHORT DESCRIPTION OF WHAT BEST FITS YOUR SYSTEM | |
| <u>INSTRUMENTATION:</u> | HONEYWELL 2000 |
| <u>DATA HISTORIAN:</u> | OSI PI |
| <u>CURRENT CONTROL STRATEGY:</u> | RUN FROM RESIDUAL CaCO ₃ ADJUST FUELADJUST ID FAN RPM FOR 2% OXYGEN |
| <u>PROCESS CONTROL SYSTEM:</u> | OUT OF TUNE FUZZY LOGIC |
| <u>ELECTRONIC OR PNEUMATIC?:</u> E | |

FIG. 9 CONT.

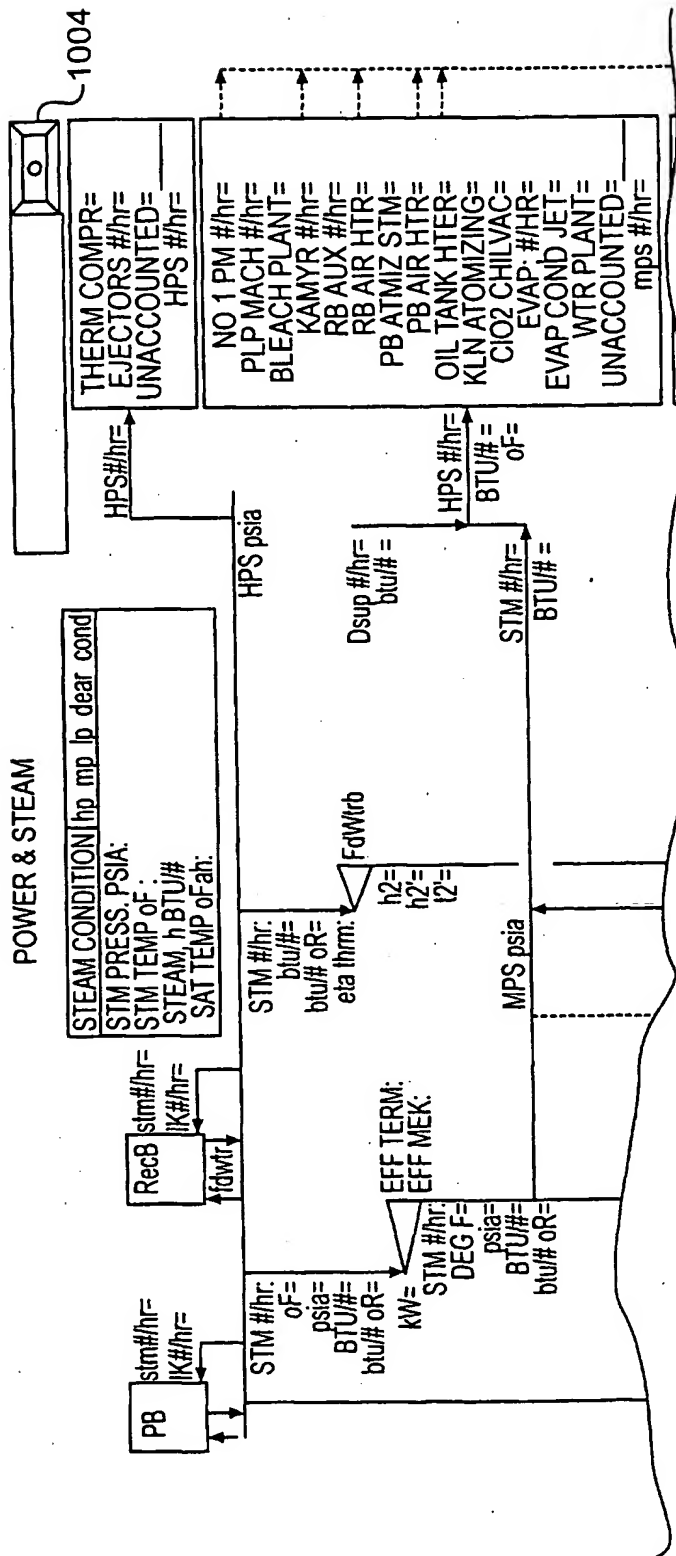

CONTINUED ON FIG. 10 CONT.

FIG. 10

CONTINUED FROM FIG. 10

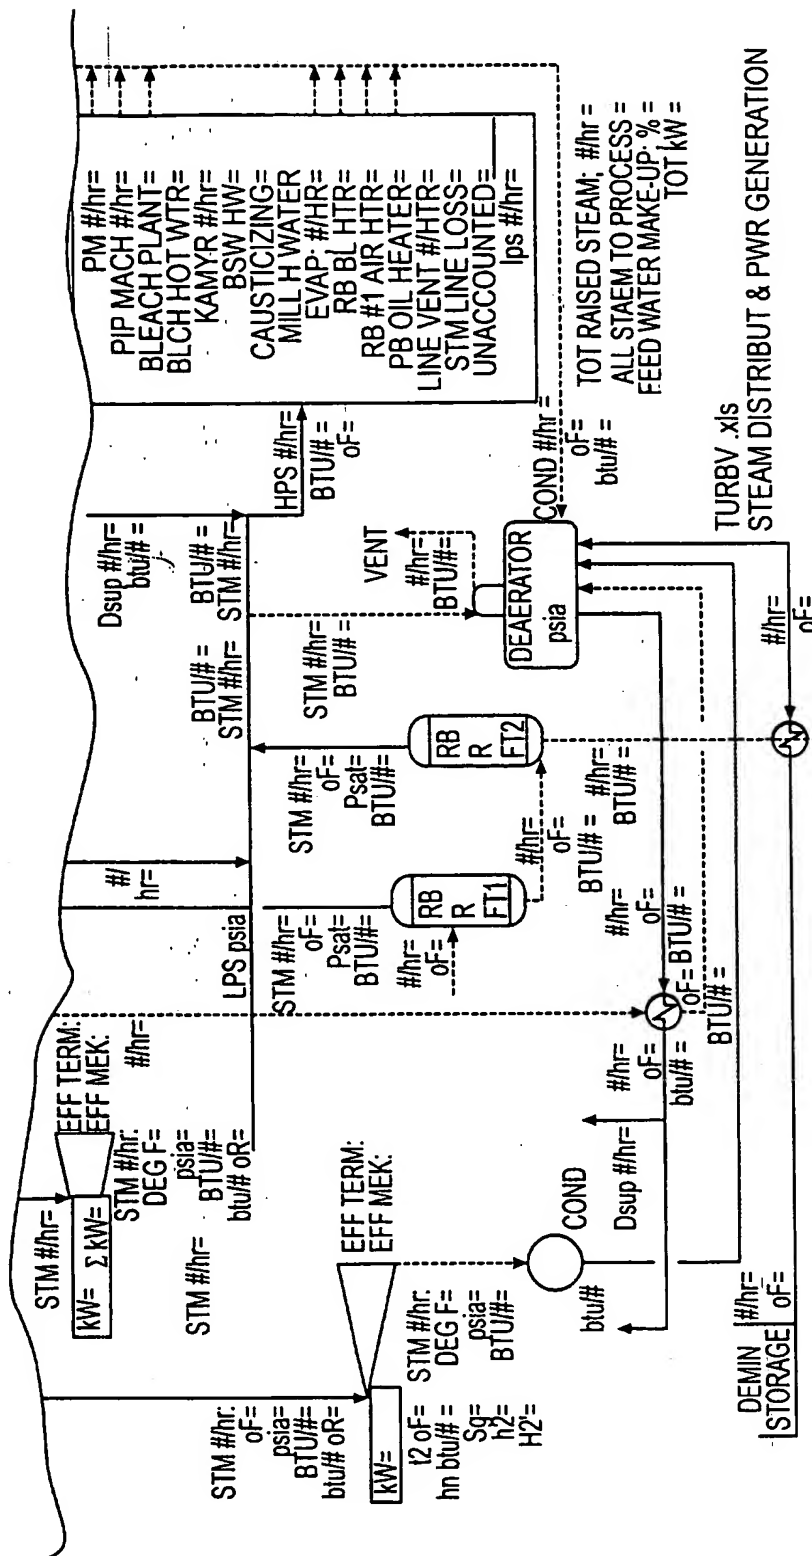


FIG. 10 CONT.

ZZZZZ


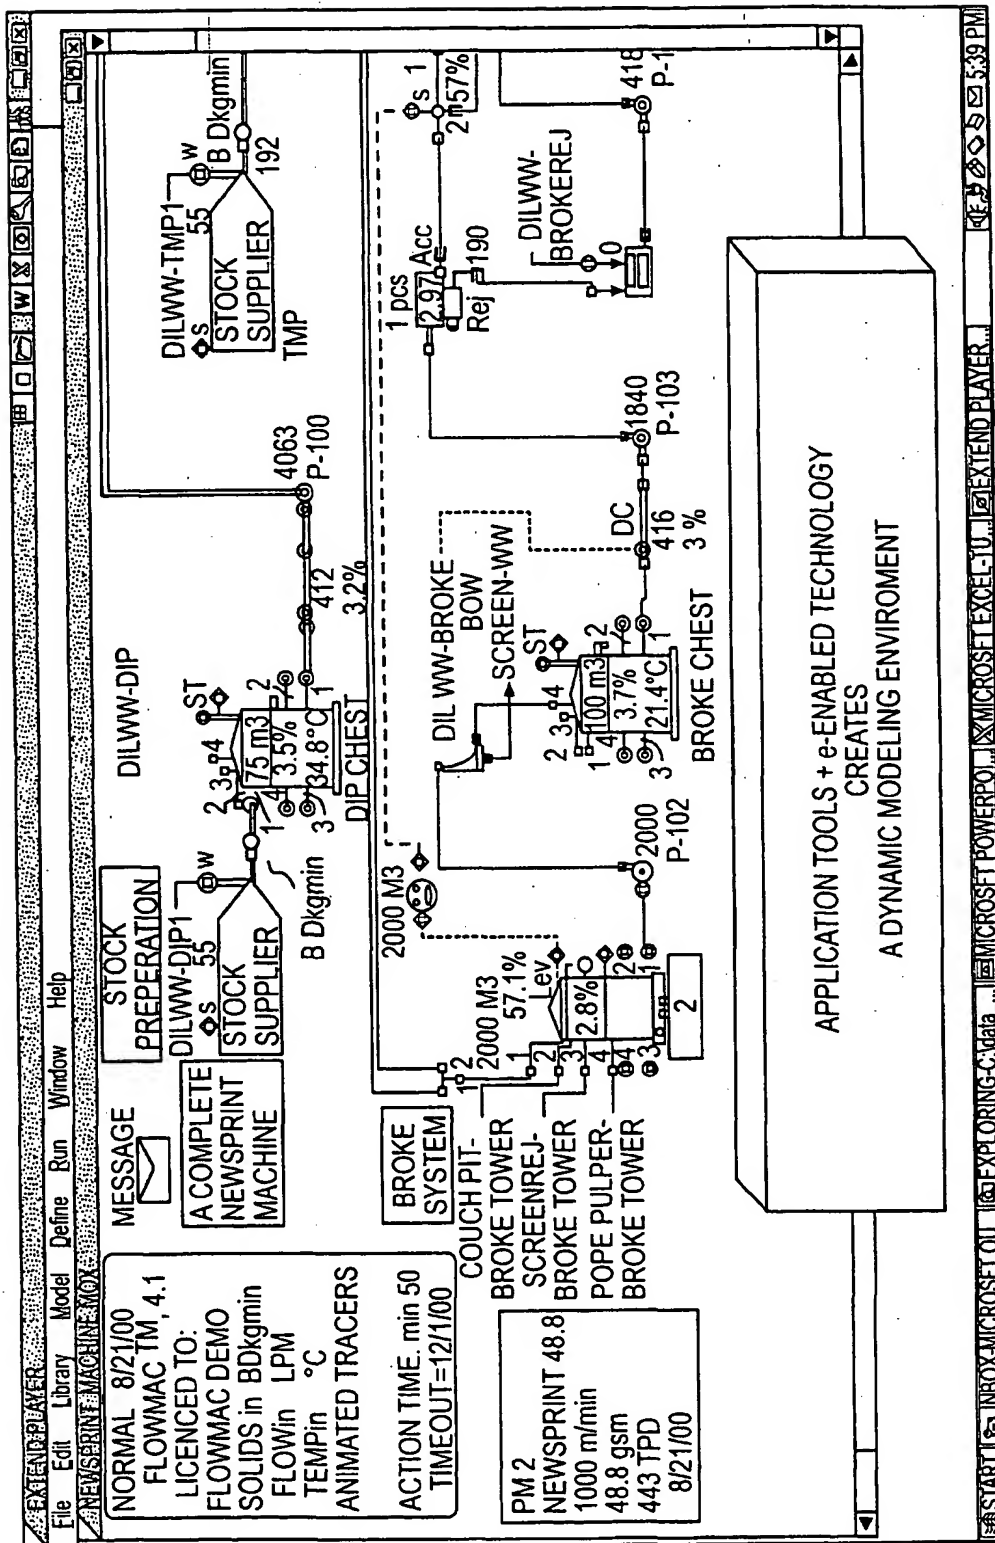


FIG. 11



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 188 860 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
19.06.2002 Bulletin 2002/25

(51) Int Cl.7: **D21G 9/00, D21C 3/22**

(43) Date of publication A2:
20.03.2002 Bulletin 2002/12

(21) Application number: **01307860.5**

(22) Date of filing: **14.09.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **15.09.2000 US 663249**

(71) Applicants:
• **GENERAL ELECTRIC COMPANY**
Schenectady, NY 12345 (US)
• **Conmark Systems Inc.**
Norcross, Georgia 30093 (US)

(72) Inventors:
• **Richardson, Jan T.**
Stone Mountain, Georgia 30087 (US)

• **Ingman, Lars C**
Alpharetta, Georgia 30005 (US)
• **Mustonen, Markku**
Lawrenceville, Georgia 30244 (US)
• **Harris, LaDoris G.**
Conyers, Georgia 30094 (US)
• **Thomas, Erwin R.**
Duluth, Georgia 30097 (US)
• **Mouret, Dave A.**
Alpharetta, Georgia 30005 (US)
• **Fujita, Lincoln M.**
Roanoke, Virginia 24018 (US)

(74) Representative: **Goode, Ian Roy et al**
GE LONDON PATENT OPERATION,
Essex House,
12/13 Essex Street
London WC2R 3AA (GB)

(54) **Method and system for optimizing mill operation**

(57) A method and system for providing equipment, unit process, department and mill modeling, simulation and optimization tools and services to a user (206) via a communications link. The user is presented with one or more mill data input interfaces (200), and mill data (202) provided through the user interfaces is processed (204) to generate benchmarking data, simulation models, and the like. The simulation models can be interactive and modified to allow a user to explore various techniques to optimize the operation of a machine, unit process, department or mill.

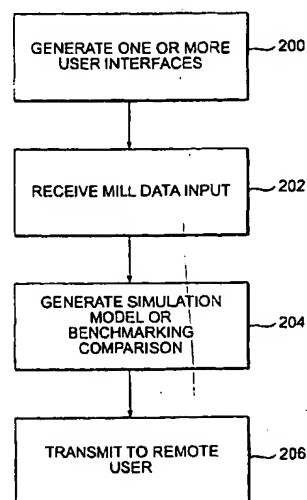


FIG. 2

EP 1 188 860 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 30 7860

| DOCUMENTS CONSIDERED TO BE RELEVANT | | | |
|---|--|----------------------------------|---|
| Category | Citation of document with indication, where appropriate, of relevant passages | Relevant to claim | CLASSIFICATION OF THE APPLICATION (Int.Cl.7) |
| X | <p>JONES G L: "INTEGRATION OF PROCESS SIMULATION WITH MILLWIDE INFORMATION AND CONTROL"</p> <p>TAPPI JOURNAL, TECHNICAL ASSOCIATION OF THE PULP & PAPER INDUSTRY. ATLANTA, US, vol. 73, no. 11, 1 November 1990 (1990-11-01), pages 113-118, XP000163302</p> <p>ISSN: 0734-1415</p> <p>* the whole document *</p> <p>-----</p> | 1-10 | <p>D21G9/00</p> <p>D21C3/22</p> |
| | | | <p>TECHNICAL FIELDS SEARCHED (Int.Cl.7)</p> <p>D21G</p> <p>D21C</p> |
| The present search report has been drawn up for all claims | | | |
| Place of search | | Date of completion of the search | Examiner |
| THE HAGUE | | 25 Apr11 2002 | Help16, T. |
| <p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant if taken alone</p> <p>Y: particularly relevant if combined with another document of the same category</p> <p>A: technological background</p> <p>O: non-written disclosure</p> <p>P: intermediate document</p> <p>T: theory or principle underlying the invention</p> <p>E: earlier patent document, but published on, or after the filing date</p> <p>D: document cited in the application</p> <p>L: document cited for other reasons</p> <p>&: member of the same patent family, corresponding document</p> | | | |

EPO FORM 1503 03/82 (P04C01)

BEST AVAILABLE COPY